




Technické údaje	Jednotka	Typ bojleru						
		AQ 30	AQ 50	AQ 80	AQ 100	AQ 120	AQ 150	AQ 200
Jmenovitý objem	l	30	50	80	100	120	150	200
Provozní tlak	MPa	0,6						
Jmenovité napětí	V	230V/50Hz						
Jmenovitý příkon	W	2400						
Jmenovitý proud	A	10,4						
Stupeň krytí		IP 24						
Rozsah předvolby teploty	°C	30 - 65						
Vodovodní přípojka		G 1/2"						
Hmotnost bez vody	kg	16,2	19,7	25	18,5	32	39	48,5
Doba ohřevu z 15°C na 65°C	hod	0,8	1,3	2,1	2,6	3,1	3,9	5,3
Spotřeba el. energie z 15 na 65°C	kWh	1,92	3,12	5,04	6,1	7,44	9,36	12,72

Typ	a	m	h
AQ 50	340	480	527
AQ 80	500	650	697
AQ 100	570	800	847
AQ 120	750	930	977
AQ 150	950	1125	1172
AQ 200	1230	1400	1447

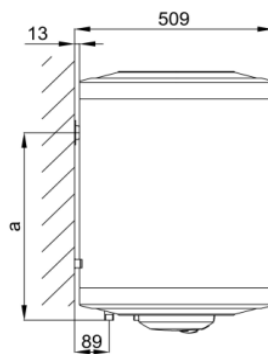

AQ 30

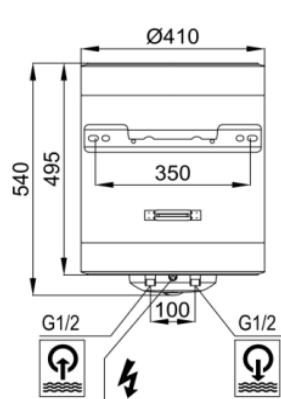

AQ 50 - 200

